

Threaded & Flanged End Swing Check Valves




Vintrol, Inc.

8200 B SW 44th Street
Oklahoma City, OK 73179
Toll Free: 1-866-345-8298
Phone: 405-261-0770
Fax: 405-261-0774
Website: www.vintrol.com

Vintrol, Inc.

PROVEN PERFORMANCE • WORLD CLASS PRODUCTS

ViNtrol Series 32
For Horizontal and Vertical Upflow Service

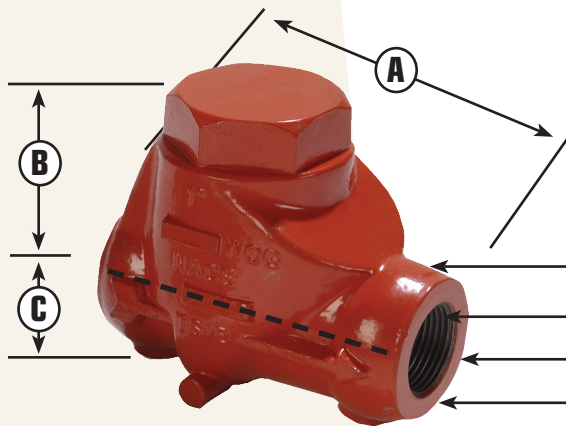


Materials

Body	• ASTM A-395
Note: Conforms to latest edition of NACE MR-01-75	• Enduro-Bond Coating Available
Disc	• CF8M S.S.
Seat	• Integral Resilient
Seals	• VITON
1/4" Pipe Plug	• 2" and above

- Rugged Ductile Body
- Stainless Steel Disc Standard
- Integral Resilient Seat
- Line-Pipe Connections


Dimensions

Size	Working Pressure	Body	Wt./lbs.	A	B	C
1"	300/600	Ductile Iron	5	4.25	3.31	1.22
2"	300/600	Ductile Iron	11	6.00	4.12	1.89
3"	300/600	Ductile Iron	21	8.00	5.43	2.43
4"	300/600	Ductile Iron	34	10.00	6.08	3.00
1"	1000	Ductile Iron	5	4.25	3.31	1.22
2"	1000	Ductile Iron	11	6.00	4.12	1.89
3"	1000	Ductile Iron	21	8.00	5.43	2.43
4"	1000	Ductile Iron	34	10.00	6.08	3.00
1"	1500	Ductile Iron	5	4.25	3.31	1.22
2"	1500	Ductile Iron	11	6.00	4.12	1.89
3"	1500	Ductile Iron	21	8.00	5.43	2.43
1"	2000	Ductile Iron	5	4.25	3.31	1.22
2"	2000	Ductile Iron	11	6.00	4.12	1.89
3"	2000	Ductile Iron	21	8.00	5.43	2.43

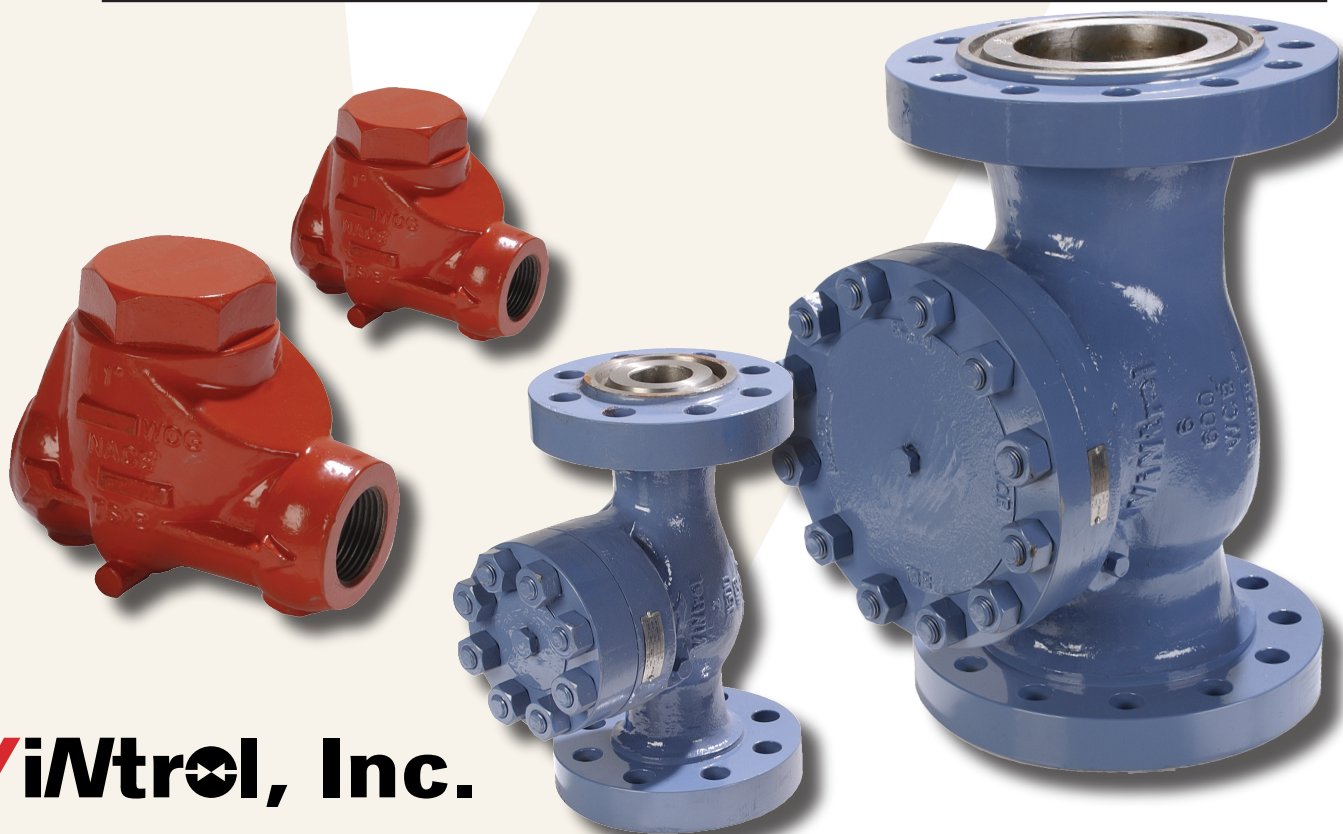

ViNtrol Series 35 for ANSI & 35A for API 6A
For Horizontal and Vertical Upflow Service

ViNtrol, Inc.

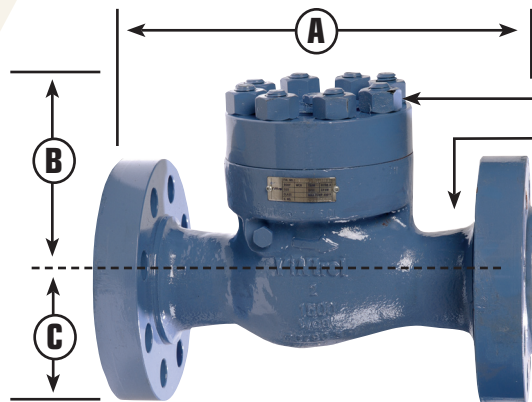

Materials

Body	• ASTM A216 WCB
Note: Conforms to latest edition of NACE MR-01-75	• ASTM A351 CF8M
	• ASTM A487 4C
Disc	• CF8M • Stellite Overlay
Seat Options	• Integral Resilient • Metal to Metal
	• 316SS Replaceable
Seals	• Viton or HT Graphite

- Bolted Bonnet w/Tap
- Rugged Carbon Steel Body
- Stainless Steel Disc Standard
- Integral or Replaceable Seat Available
- ANSI and API-6A Flanges

Dimensions

Size	ANSI/API Class	Body	Wt./lbs.	A-RF	A-RTJ	B	C
2"	150	WCB	32	8.00	-	5.75	3.00
	300	WCB	35	10.50	-	5.75	3.25
	600/API2000	WCB/4C	50	11.50	11.62	5.62	3.25
	900/API3000	WCB/4C	96	14.50	14.62	5.74	4.25
	1500/API5000	WCB/4C	100	14.50	14.62	5.74	4.25
3"	150	WCB	56	9.50	-	7.20	3.75
	300	WCB	65	12.50	-	7.20	4.12
	600/API2000	WCB/4C	92	14.00	14.20	7.20	4.12
	900/API3000	WCB/4C	115	15.00	15.12	6.73	4.75
	1500/API5000	WCB/4C	130	18.50	18.62	8.74	5.25
4"	150	WCB	75	11.50	-	7.95	4.50
	300	WCB	100	14.00	-	8.11	5.00
	600/API2000	WCB/4C	154	17.00	17.12	8.22	5.38
	900/API3000	WCB/4C	215	18.00	18.12	8.19	5.75
	1500/API5000	WCB/4C	365	21.50	21.62	8.31	6.12
6"	150	WCB	120	14.00	-	8.74	5.50
	300	WCB	185	17.50	-	9.72	6.25
	600	WCB	310	22.00	22.12	11.10	7.00
	900	WCB	435	24.00	24.12	9.19	7.50
	1500	WCB	770	27.75	28.00	10.75	7.75
8"	150	WCB	220	19.50	-	10.78	6.75
	300	WCB	375	21.00	-	10.60	7.50
	600	WCB	545	26.00	26.12	11.50	8.25
	900	WCB	775	29.00	29.12	11.00	9.25
	1500	WCB	1225	32.75	33.12	12.75	9.50
10"	150	WCB	530	24.50	-	12.63	8.00
	300	WCB	540	24.50	-	13.00	8.75
	600	WCB	1010	31.00	31.12	13.00	10.00
	900	WCB	1250	33.00	33.12	15.50	10.75
	1500	WCB	1565	39.00	39.38	18.25	11.50
12"	150	WCB	648	27.50	-	14.40	9.50
	300	WCB	900	28.00	-	14.50	10.25
	600	WCB	1350	33.00	33.12	15.00	11.00
	900	WCB	1625	38.00	38.12	17.25	12.00
	1500	WCB	2050	44.50	45.12	20.50	13.25
14"	150	WCB	1150	31.00	-	17.00	10.50
	300	WCB	1450	33.00	-	18.25	11.50
	600	WCB	2000	35.00	35.12	19.75	11.88
16"	150	WCB	2000	34.00	-	21.75	11.75
	300	WCB	2025	34.00	-	21.75	12.75
	600	WCB	2500	39.00	39.12	23.50	13.50

ViNtrol, Inc.